


Еееаio  
? еееаioа  
Ioааonoаaiiue  
?аааеoi?

I?iaeo  
? i?iaeoа  
Iic. ?  
Eieаеuiue

Страница 1 / 1  
Ааоа 02.07.2010

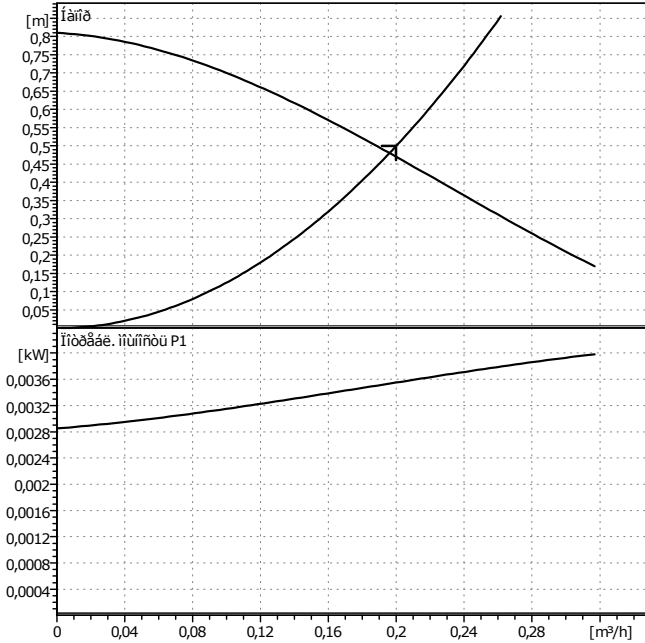

**Данные запроса**

Flow rate	0,2	m³/h
Head	0,5	m
Fluid	Water, clean	
Temperature	20	°C
Density	0,9983	kg/dm³
Viscosity	1005	mm²/s
Pressure	0	bar

**Данные насоса**

Manufacturer	WILO	
Model	Star-Z NOVA A	
Aggregate type	Pump	
Pressure level	PN10	
Min. temperature	0	°C
Max. temperature	5	°C

**Данные гидравлики (рабочая точка)**

Flow rate	0,196	m³/h
Head	0,48	m
Power consumption P1	0,00353	kW
Speed	2600	1/min

**Мин. давление на входе**

Temperature	40	65				°C
Min. pressure at inlet	0,5	2				m

**Материалы / уплотнение**

Body	Brass
Shaft	Stainless steel
Impeller	Stainless steel
Seal	Graphite, impregnated synth. resin

**Размеры**

				mm	
l0	138	b3	41,5		
l1	94,9	b4	50,15		
l3	66,35	b5	41,5		
a1	24				
b1	69,35				

Connection	Rp 1/2/G 1	/ PN 10
Connection	Rp 1/2/G 1	/ PN 10
Weight	1,33	kg

**Данные мотора**

Rated power P2	0,9 W	
Power consumption P1	4,5 W	
Speed	3000	1/min
Voltage	1~230 V, 50 Hz	
Max. current	0,05	A
Protection	IP 42	
Voltage fluctuation	Acceptable voltage fluctuation +/- 10%	

Art.№ стандартного исполнения 4132751

