


TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		POTENZA ASSORBITA INPUT POWER	AMPERE		Q = PORTATA - CAPACITY														
Monofase Single-phase	Trifase Three-phase	P2		P1	Monofase Single-phase	Trifase Three-phase	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.														
		HP	kW	kW			m³/h	0	1,2	2,4	3,6	4,8	6	8,4	9,6	10,8					
230V-50Hz	230/400V-50Hz				1 x 230V	3 x 400V	0	20	40	60	80	100	140	160	180						
RXM 4-3	RX 4-3	0,75	0,55	0,9	3,9	1,8	30	28,5	26,5	24,5	22,5	19,5	13	8							
RXM 4-4	RX 4-4	1	0,75	1,1	4,8	2	39,5	38	35	32	29	25	16	11							
RXM 4-5	RX 4-5	1	0,75	1,3	5,7	2,3	49,5	47	44	40	36	32	21	14							
RXM 4-6	RX 4-6	1,5	1,1	1,6	7	2,8	60	56	52	48	44	38,5	26	18	10						

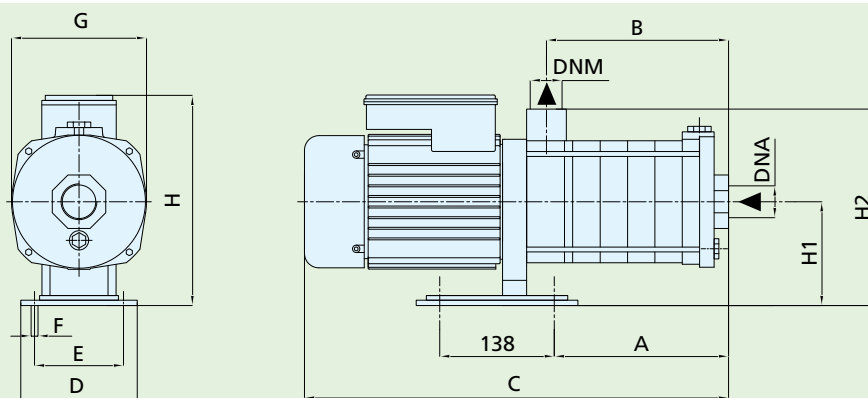

TIPO TYPE		DIMENSIONI mm - DIMENSIONS mm													DIMENSIONI DIMENSIONS mm			PESO WEIGHT
Monofase Single-phase	Trifase Three-phase	A	B	C	D	E	F	G	H	H1	H2	Giranti Impellers	DNA	DNM	P	L	H	Kg
RXM 4-3	RX 4-3	106	140	362	130	108	9	143	216	90	155	3	1"¼	1"	145	435	235	10
RXM 4-4	RX 4-4	133	167	389	130	108	9	143	216	90	155	4	1"¼	1"	145	435	235	10,5
RXM 4-5	RX 4-5	160	194	416	130	108	9	143	216	90	155	5	1"¼	1"	145	435	235	11
RXM 4-6	RX 4-6	187	221	443	130	108	9	143	216	90	155	6	1"¼	1"	145	495	235	12